


# HZ-DW-TYP-HFR

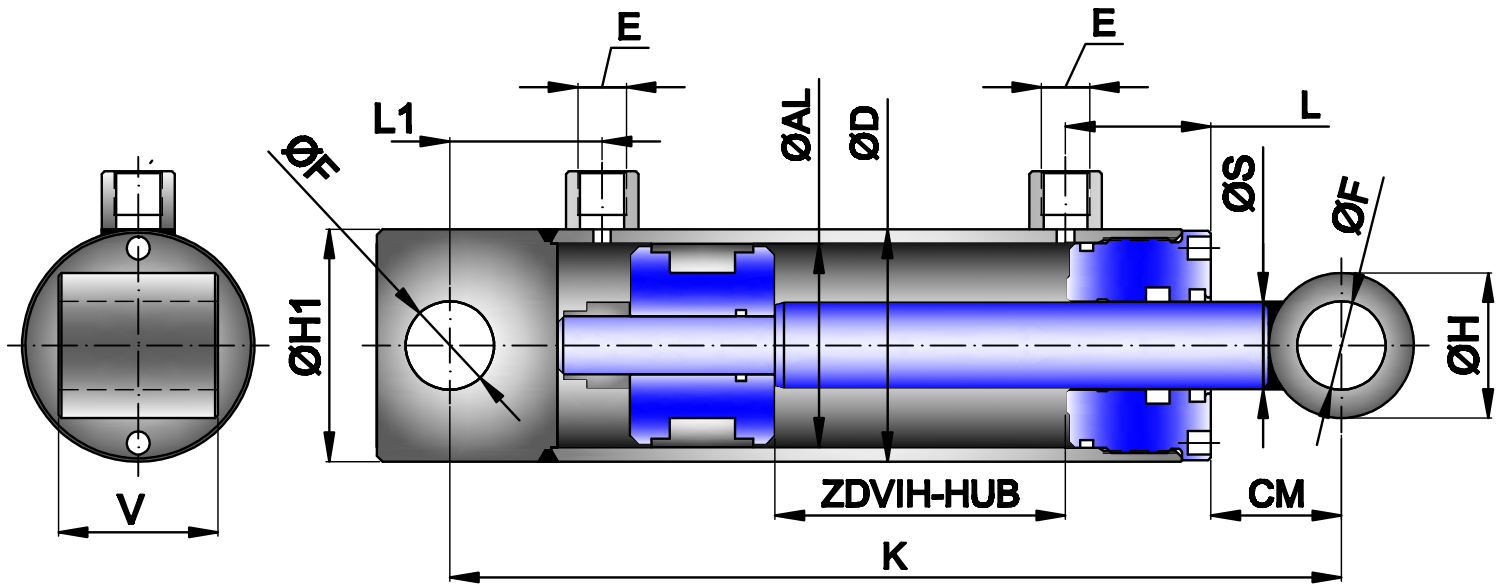

Dauergeschwindigkeit: max. 0,2 m/s  
 Höchstgeschwindigkeit: max. 0,5 m/s  
 Dauerdruck: max. 140 bar  
 Höchstdruck: max. 250 bar

Temperaturbereich: -25° C +80° C  
 Kolbenstange: Stahl UNI C45  
 Kolbenstange: Chrom 25 Micron +/-5  
 Rohr: Stahl DIN 2393 -ISO H9

Bestellnr.	ØD	ØAL	ØS	Hub	K	E	CM	L	L1	ØH	ØH1	ØF	V	Kg.
HFR0160050	35	25	16	50	160	1/4"	31	23	22	25	35	12,1	25	1,00
HFR0160100				100	210									1,20
HFR0160150				150	260									1,40
HFR0160200				200	310									1,70
HFR0200050	42	32	20	50	205	1/4"	31	33	35	30	40	16,2	35	1,70
HFR0200100				100	255									2,10
HFR0200150				150	305									2,40
HFR0200200				200	355									2,80
HFR0200250				250	405									3,10
HFR0200300				300	455									3,50
HFR0200400				400	555									4,20
HFR0200500	500	655	4,80											
HFR1250100	50	40	25	100	270	3/8"	51	40	45	40	50	20,5	40	3,23
HFR1250150				150	320									3,71
HFR1250200				200	370									4,16
HFR1250250				250	420									4,66
HFR1250300				300	470									5,12
HFR1250400				400	570									6,05
HFR1250500				400	670									6,99
HFR1250600				600	770									7,95
HFR1250700				700	870									8,87
HFR1250800	800	970	9,92											