


# HZ-DW-TYP-HM1

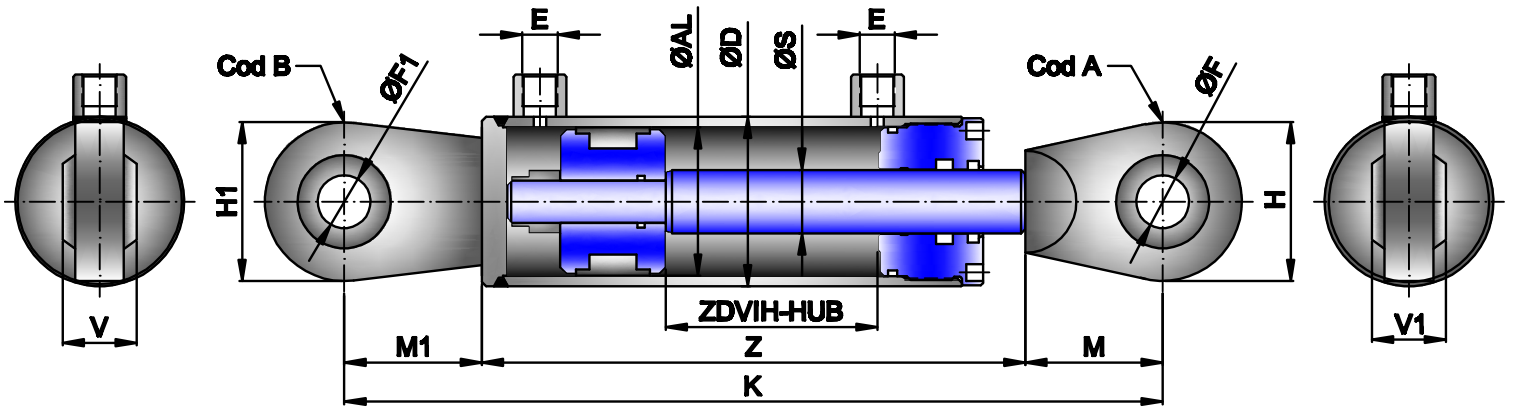

Dauergeschwindigkeit :0,2 m/s  
 Dauerdruck: max.140 bar  
 Höchstdruck: max.200 bar  
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s  
 Kolbenstange: Stahl UNIC45  
 Kolbenstange: Chrom 25 Micron +/-5  
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	K	Z	Kg.	E	F	F1	H	H1	V	V1	M	M1	COD A	COD B
HM11200100	50	40	20	100	350	230	2,79	1/4"	16	16	46	46	20	20	60	60	SGK0010495	SGK0010495
HM11200150				150	400	280	3,19											
HM11200200				200	450	330	3,57											
HM11200250				250	500	380	3,97											
HM11200300				300	550	430	4,37											
HM11200350				350	600	480	4,79											
HM11200400				400	650	530	5,17											
HM11200450				450	700	580	5,60											
HM11200500				500	750	630	6,01											
HM11250150				50	40	25	150											
HM11250200	200	450	330				3,91											
HM11250250	250	500	380				4,37											
HM11250300	300	550	430				4,84											
HM11250350	350	600	480				5,31											
HM11250400	400	650	530				5,78											
HM11250450	450	700	580				6,24											
HM11250500	500	750	630				6,72											
HM11250550	550	800	680				7,12											
HM11250600	600	850	730				7,65											
HM12250100	60	50	25	100	356	240	4,49	3/8"	20	20	62	62	44	44	58	58	SGK0010720	SGK0010720
HM12250150				150	406	290	5,03											
HM12250200				200	456	340	5,54											
HM12250250				250	506	390	6,05											
HM12250300				300	556	440	6,55											
HM12250350				350	606	490	7,14											
HM12250400				400	656	540	7,60											
HM12250450				450	706	590	8,50											
HM12250500				500	756	640	8,63											
HM12250550				550	806	690	9,26											
HM12250600				600	856	740	9,66											
HM12250800				800	1056	940	11,91											
HM12251000				1000	1256	1140	14,07											