


# HZ-DW-TYP-HM2

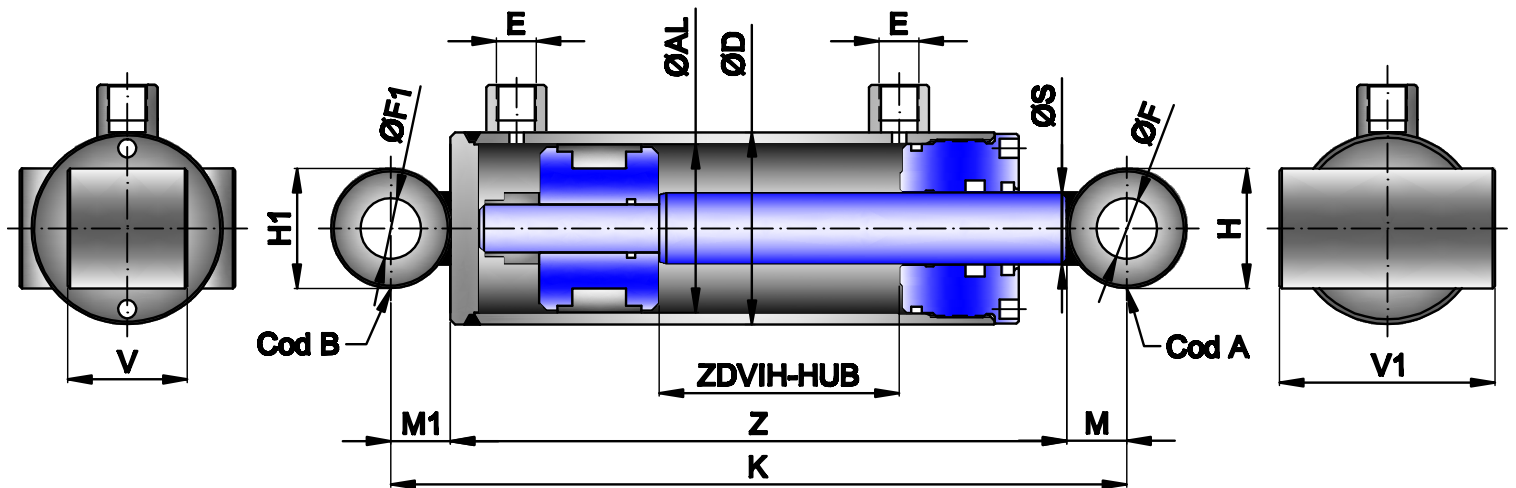

Dauergeschwindigkeit: 0,2 m/s  
 Dauerdruck: max.140 bar  
 Höchstdruck: max.200 bar  
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s  
 Kolbenstange: Stahl UNIC45  
 Kolbenstange: Chrom 25 Micron +/-5  
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	K	Z	Kg.	E	F	F1	H	H1	V	V1	M	M1	COD A	COD B
HM21200100	50	40	20	100	265	230	2,81	1/4"	16,25	16,25	35	35	30	60	17,5	17,5	ZBU16035030	ZBU16035060
HM21200150				150	315	280	3,21											
HM21200200				200	365	330	3,59											
HM21200250				250	415	380	3,99											
HM21200300				300	465	430	4,39											
HM21200350				350	515	480	4,81											
HM21200400				400	565	530	5,19											
HM21200450				450	615	580	5,62											
HM21200500				500	665	630	6,03											
HM21250150				50	40	25	150											
HM21250200	200	365	330				3,93											
HM21250250	250	415	380				4,39											
HM21250300	300	465	430				4,86											
HM21250350	350	515	480				5,33											
HM21250400	400	565	530				5,80											
HM21250450	450	615	580				6,26											
HM21250500	500	665	630				6,74											
HM21250550	550	715	680				7,14											
HM21250600	600	765	730				7,67											
HM22250100	60	50	25	100	280	240	4,08	3/8"	20,25	20,25	40	40	40	70	20	20	ZBU20040040	ZBU20040070
HM22250150				150	330	290	4,62											
HM22250200				200	380	340	5,13											
HM22250250				250	430	390	5,64											
HM22250300				300	480	440	6,14											
HM22250350				350	530	490	6,73											
HM22250400				400	580	540	7,19											
HM22250450				450	630	590	8,09											
HM22250500				500	680	640	8,22											
HM22250550				550	730	690	8,85											
HM22250600				600	780	740	9,25											
HM22250800				800	980	940	11,50											
HM22251000				1000	1180	1140	13,66											