


# HZ-DW-TYP-HM5

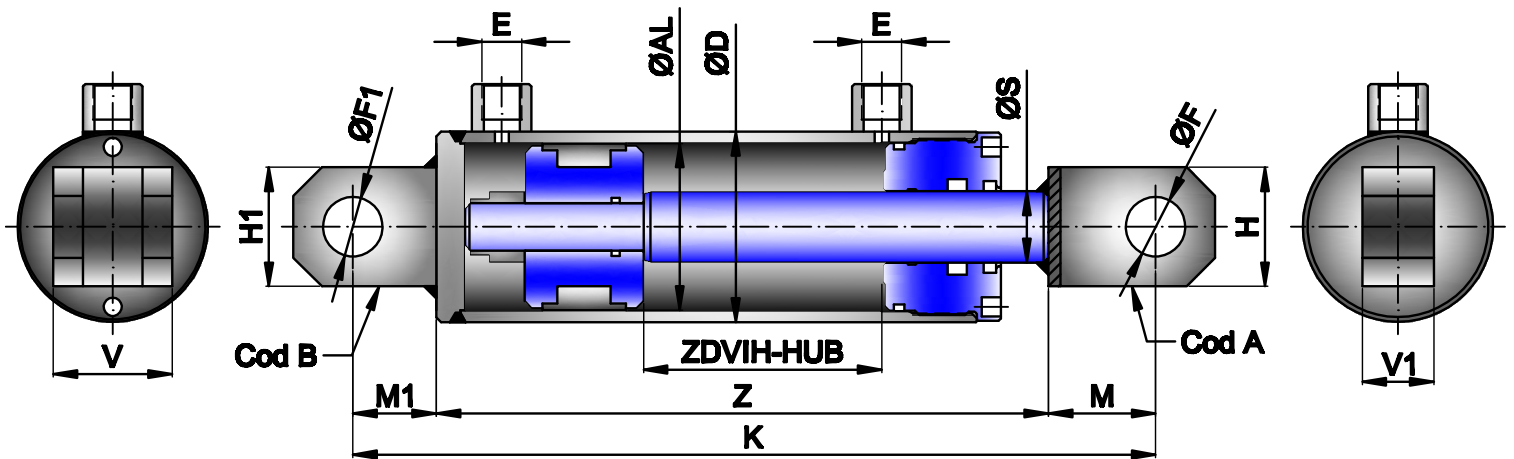

Dauergeschwindigkeit :0,2 m/s

Dauerdruck: max.140 bar

Höchstdruck: max.200 bar

Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s

Kolbenstange: Stahl UNIC45

Kolbenstange: Chrom 25 Micron +/-5

Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	K	Z	Kg.	E	F	F1	H	H1	V	V1	M	M1	COD A	COD B
HM51200100	50	40	20	100	289	230	2,72	1/4"	16,2	16,2	35	35	35	20	34	25	SG0000016	FA1600000
HM51200150				150	339	280	3,12											
HM51200200				200	389	330	3,50											
HM51200250				250	439	380	3,90											
HM51200300				300	489	430	4,30											
HM51200350				350	539	480	4,72											
HM51200400				400	589	530	5,10											
HM51200450				450	639	580	5,53											
HM51200500				500	689	630	5,94											
HM51250150				50	40	25	150											
HM51250200	200	389	330				3,84											
HM51250250	250	439	380				4,30											
HM51250300	300	489	430				4,77											
HM51250350	350	539	480				5,24											
HM51250400	400	589	530				5,71											
HM51250450	450	639	580				6,17											
HM51250500	500	689	630				6,65											
HM51250550	550	739	680				7,05											
HM51250600	600	789	730				7,58											
HM52250100	60	50	25	100	310	240	4,02	3/8"	20,25	20,25	40	45	40	25	40	30	SG0000020	FA2000000
HM52250150				150	360	290	4,56											
HM52250200				200	410	340	5,07											
HM52250250				250	460	390	5,58											
HM52250300				300	510	440	6,08											
HM52250350				350	560	490	6,67											
HM52250400				400	610	540	7,13											
HM52250450				450	660	590	8,03											
HM52250500				500	710	640	8,16											
HM52250550				550	760	690	8,79											
HM52250600				600	810	740	9,19											
HM52250800				800	1010	940	11,44											
HM52251000				1000	1210	1140	13,60											