


# HZ-DW-TYP-HMA

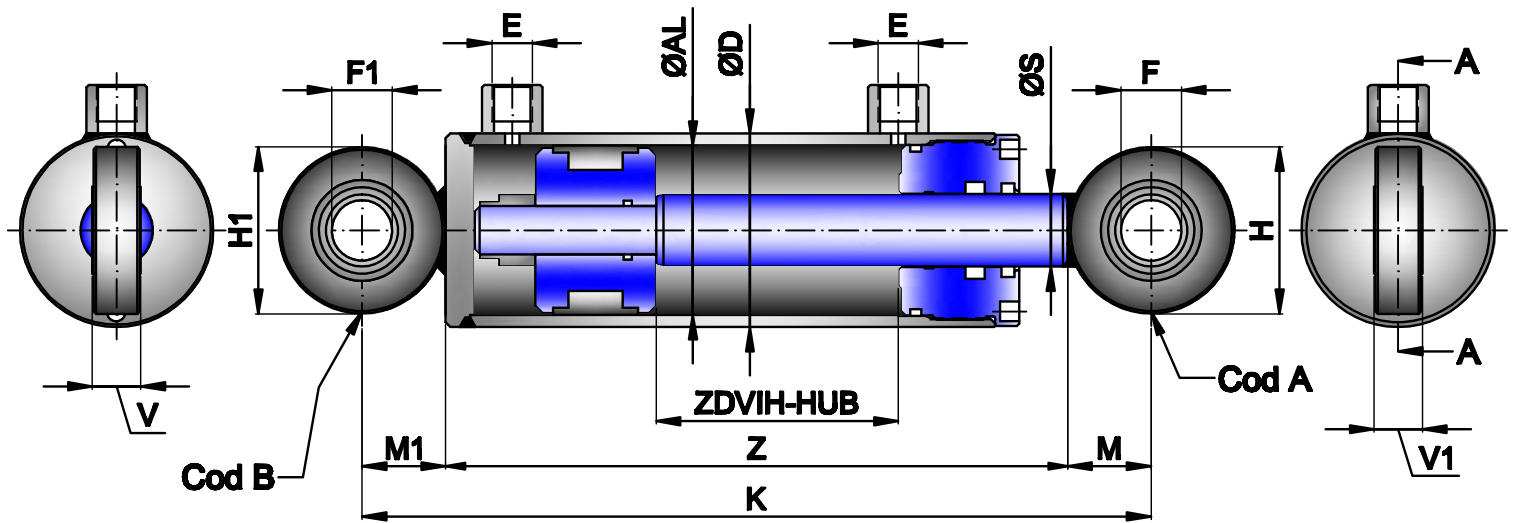

Dauergeschwindigkeit :0,2 m/s  
 Dauerdruck: max.140 bar  
 Höchstdruck: max.200 bar  
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s  
 Kolbenstange: Stahl UNIC45  
 Kolbenstange: Chrom 25 Micron +/-5  
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	K	Z	Kg.	E	F	F1	H	H1	V	V1	M	M1	COD A	COD B
HMA1200100	50	40	20	100	270	230	2,45	1/4"	15	15	40	40	12	12	20	20	GLRL040026+GE15	GLRL040026+GE15
HMA1200150				150	320	280	2,85											
HMA1200200				200	370	330	3,23											
HMA1200250				250	420	380	3,63											
HMA1200300				300	470	430	4,03											
HMA1200350				350	520	480	4,45											
HMA1200400				400	570	530	4,83											
HMA1200450				450	620	580	5,26											
HMA1200500				500	670	630	5,67											
HMA1250150				50	40	25	150											
HMA1250200	200	370	330				3,57											
HMA1250250	250	420	380				4,03											
HMA1250300	300	470	430				4,50											
HMA1250350	350	520	480				4,97											
HMA1250400	400	570	530				5,44											
HMA1250450	450	620	580				5,90											
HMA1250500	500	670	630				6,38											
HMA1250550	550	720	680				6,78											
HMA1250600	600	770	730				7,31											
HMA2250100	60	50	25	100	290	240	3,63	3/8"	20	20	50	50	16	16	25	25	GLRL050035+GE20	GLRL050035+GE20
HMA2250150				150	340	290	4,17											
HMA2250200				200	390	340	4,68											
HMA2250250				250	440	390	5,19											
HMA2250300				300	490	440	5,69											
HMA2250350				350	540	490	6,28											
HMA2250400				400	590	540	6,74											
HMA2250450				450	640	590	7,64											
HMA2250500				500	690	640	7,77											
HMA2250550				550	740	690	8,40											
HMA2250600				600	790	740	8,80											
HMA2250800				800	990	940	11,05											
HMA2251000				1000	1190	1140	13,21											