


# HZ-DW-TYP-HMB

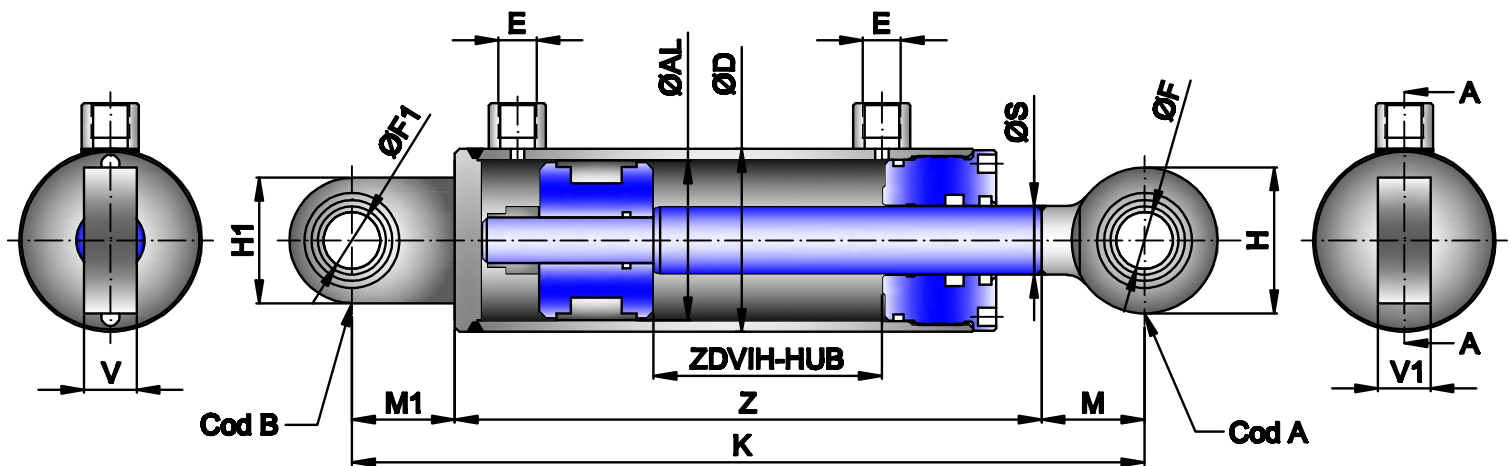

Dauergeschwindigkeit :0,2 m/s  
 Dauerdruck: max.140 bar  
 Höchstdruck: max.200 bar  
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s  
 Kolbenstange: Stahl UNIC45  
 Kolbenstange: Chrom 25 Micron +/-5  
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	K	Z	Kg.	E	F	F1	H	H1	V	V1	M	M1	COD A	COD B
HMB1200100	50	40	20	100	300	230	2,72	1/4"	16	16	46	48	14	17,5	35	35	NSGK016C00	NSGK016N00
HMB1200150				150	350	280	3,12											
HMB1200200				200	400	330	3,50											
HMB1200250				250	450	380	3,90											
HMB1200300				300	500	430	4,30											
HMB1200350				350	550	480	4,72											
HMB1200400				400	600	530	5,10											
HMB1200450				450	650	580	5,53											
HMB1200500				500	700	630	5,94											
HMB1250150	50	40	25	150	350	280	3,40	1/4"	16	16	46	48	14	17,5	35	35	NSGK016C00	NSGK016N00
HMB1250200				200	400	330	3,84											
HMB1250250				250	450	380	4,30											
HMB1250300				300	500	430	4,77											
HMB1250350				350	550	480	5,24											
HMB1250400				400	600	530	5,71											
HMB1250450				450	650	580	6,17											
HMB1250500				500	700	630	6,65											
HMB1250550				550	750	680	7,05											
HMB1250600	600	800	730	7,58														
HMB2250100	60	50	25	100	316	240	3,89	3/8"	20	20	53	50	16	19	38	38	NSGK020C00	NSGK020N00
HMB2250150				150	366	290	4,43											
HMB2250200				200	416	340	4,94											
HMB2250250				250	466	390	5,45											
HMB2250300				300	516	440	5,95											
HMB2250350				350	566	490	6,54											
HMB2250400				400	616	540	7,00											
HMB2250450				450	666	590	7,90											
HMB2250500				500	716	640	8,03											
HMB2250550				550	766	690	8,66											
HMB2250600				600	816	740	9,06											
HMB2250800				800	1016	940	11,31											
HMB2251000				1000	1216	1140	13,47											