


HZ-DW-TYP-HMO

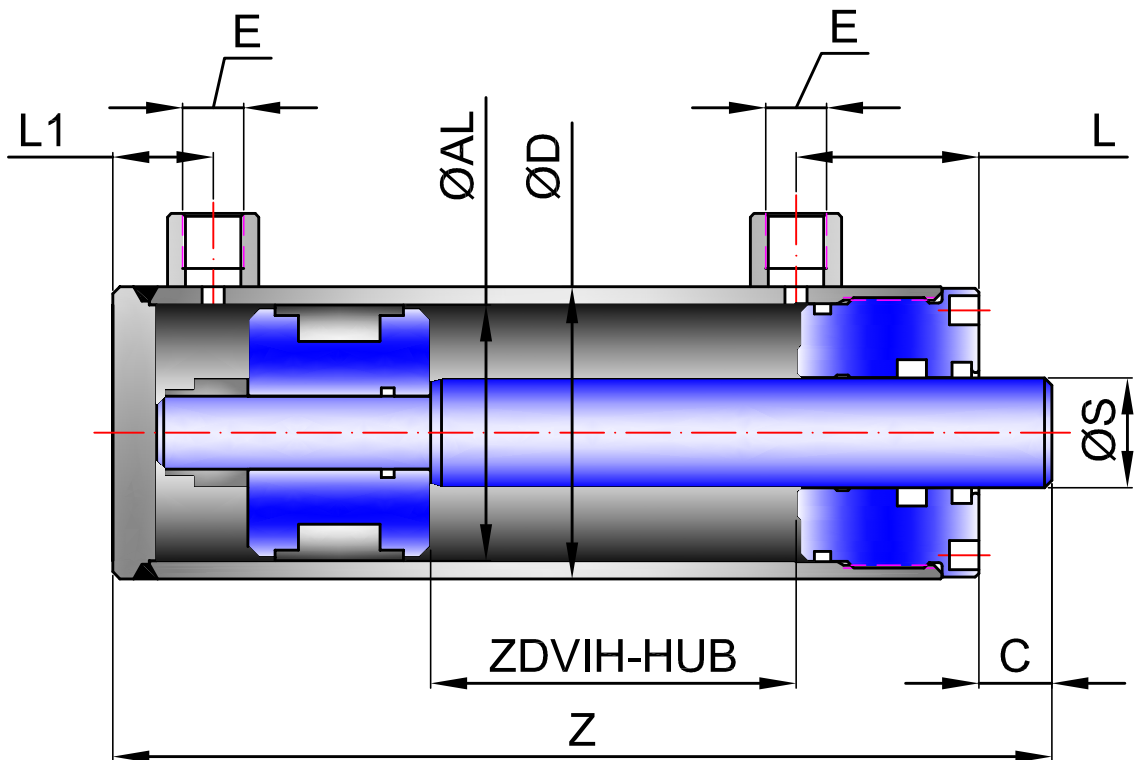

Dauergeschwindigkeit: 0,2 m/s
 Dauerdruck: max.140 bar
 Höchstdruck: max.200 bar
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s
 Kolbenstange: Stahl UNIC45
 Kolbenstange: Chrom 25 Micron +/-5
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	Hub	Z	C	E	L	L1	Kg.
HMO025160050	35	25	16	50	135	17	1/4"	33	15	0,70
HMO025160100				100	185					0,95
HMO025160150				150	235					1,25
HMO025160200				200	285					1,50
HMO032200050	42	32	20	50	155	16	1/4"	33	20	1,30
HMO032200100				100	205					1,60
HMO032200150				150	255					1,95
HMO032200200				200	305					2,30
HMO032200250				250	355					2,70
HMO032200300				300	405					3,00
HMO032200400				400	505					3,70
HMO032200500	500	605	4,40							
HMO1200100	50	40	20	100	230	22	1/4"	40	23	2,27
HMO1200150				150	280					2,67
HMO1200200				200	330					3,05
HMO1200250				250	380					3,45
HMO1200300				300	430					3,85
HMO1200350				350	480					4,27
HMO1200400				400	530					4,65
HMO1200450				450	580					5,08
HMO1200500				500	630					5,49