


HZ-PLUNGER-TYP-HFRT

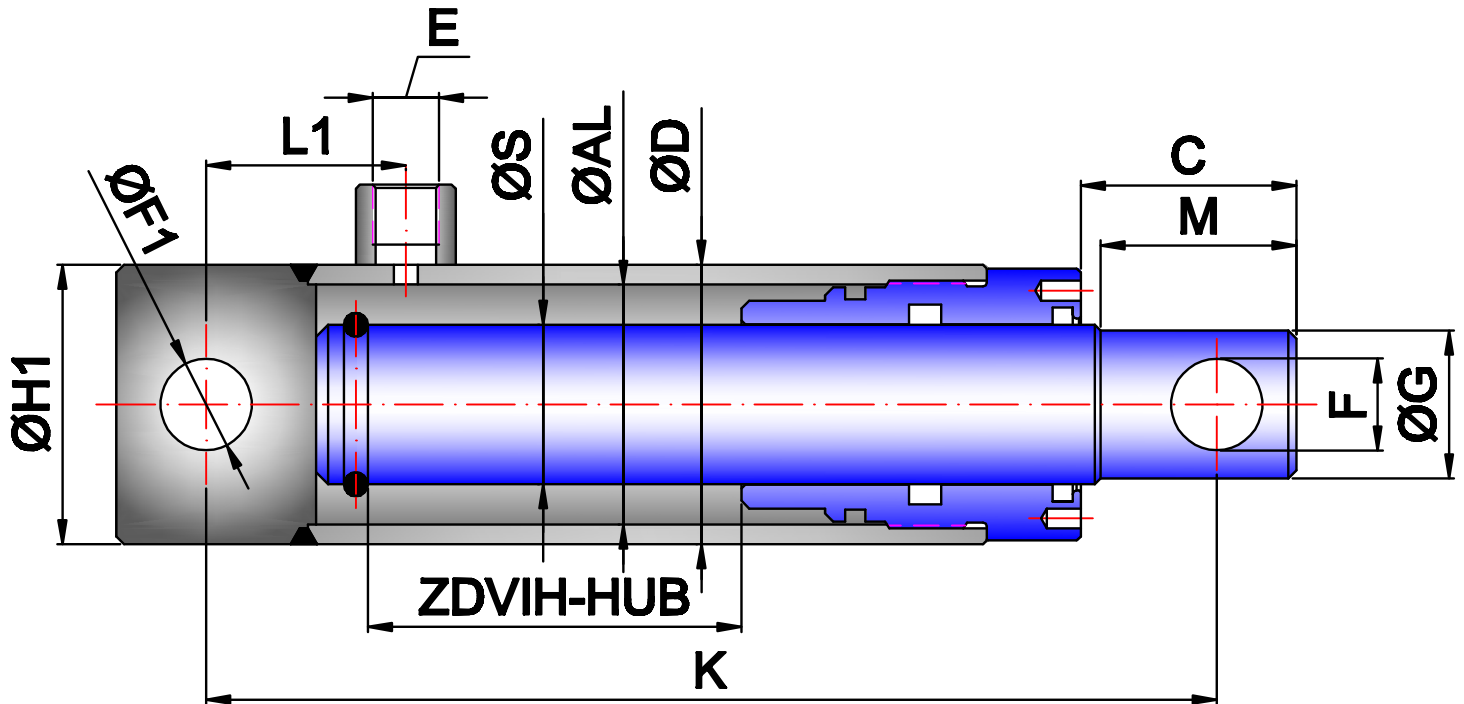

Dauergeschwindigkeit: 0,2 m/s
 Dauerdruck: max.140 bar
 Höchstdruck: max.250 bar
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s
 Kolbenstange: Stahl UNIC45
 Kolbenstange: Chrom 25 Micron +/-5
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	K	E	M	C	L1	ØF	ØF1	ØG	ØH1	Kg.
HFRT125100	40	30	25	100	190	3/8"	35	38	40	14	14	22	40	1,63
HFRT125150				150	240									2,04
HFRT125200				200	290									2,44
HFRT125250				250	340									2,85
HFRT125300				300	390									3,26
HFRT230200	50	40	30	200	300	3/8"	37	42	42	16	16	27	50	3,61
HFRT230250				250	350									4,16
HFRT230300				300	400									4,72
HFRT230350				350	450									5,27
HFRT230400				400	500									5,82
HFRT230550				550	650									7,30
HFRT340200	60	50	40	200	330	3/8"	49	54	47	23	23	37	60	6,00
HFRT340250				250	380									6,84
HFRT340300				300	430									7,67
HFRT340350				350	480									8,49
HFRT340400				400	530									9,32
HFRT340550				550	680									11,70
HFRT340700				700	830									14,10
HFRT450300	70	60	50	300	460	3/8"	65	74	50	25,5	25,5	47	65	11,80
HFRT450400				400	560									14,00
HFRT450550				550	710									17,50
HFRT450700				700	860									21,00