


HZ-PLUNGER-TYP-HTO

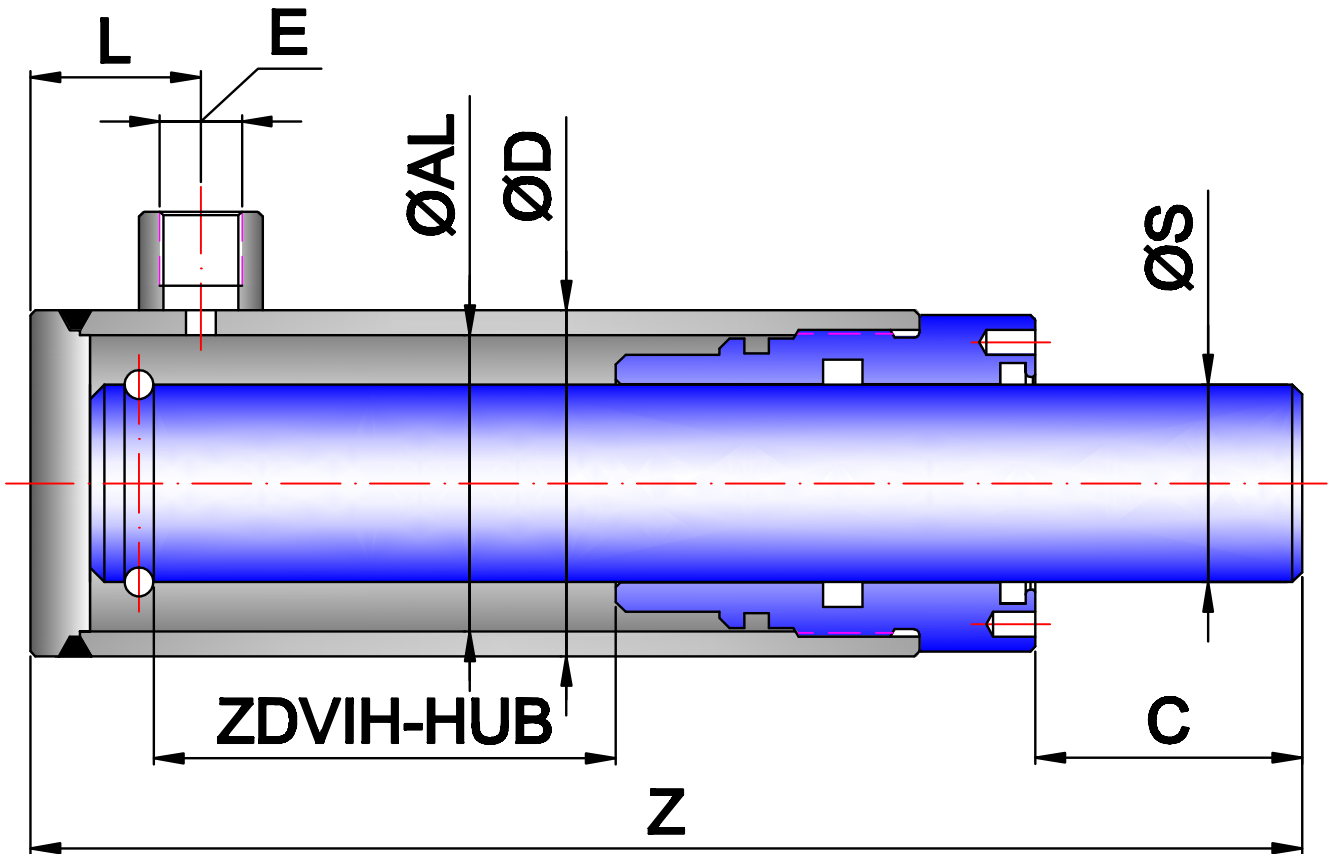

Dauergeschwindigkeit: 0,2 m/s
 Dauerdruck: max.140 bar
 Höchstdruck: max.250 bar
 Temperaturbereich C°: -25° +80°

Höchstgeschwindigkeit: 0,5 m/s
 Kolbenstange: Stahl UNIC45
 Kolbenstange: Chrom 25 Micron +/- 5
 Rohr: Stahl ST52.3-DIN2393 ISO H9

Bestellnr.	ØD	ØAL	ØS	HUB	Z	E	C	L	Kg.
HTO2300200	50	40	30	200	326	3/8"	40	23	3,64
HTO2300250				250	376				4,19
HTO2300300				300	426				4,75
HTO2300350				350	476				5,31
HTO2300400				400	526				5,86
HTO2300500				500	626				6,96
HTO3400200	60	50	40	200	338	3/8"	45	26	5,64
HTO3400300				300	438				7,29
HTO3400400				400	538				8,98
HTO3400500				500	638				10,61
HTO3400600				600	738				12,28
HTO4500300	70	60	50	300	450	3/8"	50	30	10,47
HTO4500400				400	550				12,86
HTO4500500				500	650				15,14
HTO4500600				600	750				17,50